

EXIT/EMERGENCY

FEATURES

- Easy to install
- Long battery life
- Environmentally friendly
- Energy saving
- Single and double-sided installation
- Wall and ceiling mountable

LISTINGS

- UL Listed for Dry/Damp locations
- Safety and performance in accordance with UL-924
- Title 20 and Title 24 (JA8) Compliant (90CRI models only)

PERFORMANCE

• ≥90 minutes of emergency operating power at the rated wattage

ELECTRICAL SPECIFICATIONS

Input voltage: 120/277VInput power: 1W/3.5W/4W

Power Factor: >0.5

• Emergency operation: ≥90 mins

Recharge: 24 hrs

THERMAL

• 32°F to 104°F (0°C to 40°C) operating temperature

CONSTRUCTION

Injection molded ABS and polycarbonate housings

WARRANTY

• 3 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date









EXIT/EM-R

EXIT/EM-G



EML

(Fixtures available in white or black housing)

APPLICATIONS

• Emergency and exit lighting











EXAMPLE: EXIT/EM-R-BK



ORDERING INFORMATION

 Model
 Sign Color
 Housing Color

 EXIT - Exit Sign
 R - Red
 W - White


 EML - Emergency Light
 G - Green
 W - White

 EXIT/EM - Exit Sign with Emergency Light
 BK - Black


PERFORMANCE SUMMARY

Order Code	Item #	Lumens	Description
11033	EXIT-R-W	100	Exit Sign Red White Housing
11034	EXIT-G-W	100	Exit Sign Green White Housing
11035	EXIT-R-BK	100	Exit Sign Red Black Housing
11036	EXIT-G-BK	100	Exit Sign Green Black Housing
11037	EXIT/EM-R-W	100	Exit Sign Red with Emergency Light White Housing
11038	EXIT/EM-G-W	100	Exit Sign Green with Emergency Light White Housing
11039	EXIT/EM-R-BK	100	Exit Sign Red with Emergency Light Black Housing
11040	EXIT/EM-G-BK	100	Exit Sign Green with Emergency Light Black Housing
11041	EML-W	100	Emergency Light White Housing
11042	EML-BK	100	Emergency Light Black Housing


DIMENSIONS



EXIT (includes second face plate)

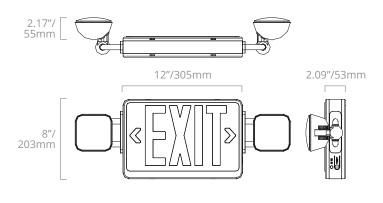

EXIT/EM (includes second face plate)



EML