

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

## CP-AOK SERIES Adjustable LED Canopy/Garage

The CP-AOK Series is great for commercial and industrial applications. Integrated Programmable Microwave Occupancy Sensor, with field adjustable output and color temperature make the CP-AOK canopy light the ideal solution in building entrances and drive-through entryways and provide added visibility for pedestrians and vehicles.



### Applications

Ideal for use in exterior commercial and industrial building entrances, drive-through entry ways, and overhangs in hotels, schools, offices, gas, and service stations.

### Construction

Housing made from die-cast aluminum. Polycarbonate lens.

### Optics

IES Type VS

### Beam Angle

160 Degree

### Mounting

Surface Mount standard. Pendant Mount option supplied by Installer.

### Electrical

Utilizes high-efficiency LED power supply and circuit boards.  
120-277V & 0-10V dimming standard. 50/60HZ input frequency.  
6KV Surge Protection.

### Operating Temperature

Suitable for -30°C – 45°C Ambient

### CRI

80+

### Finish

Dark Bronze standard, Black or White with 100 piece MOQ - delivery 90 days.

### Warranty

Standard five-year warranty. Optional 10 year is available. Terms and Conditions Apply. See warranty documentation for more information.

### Certification

UL Wet Listed. Adheres to LM79, LM80 and TM21 industry standards.  
L70 @ >100,000 hrs @ 25°C/77°F ambient fixture temperature.  
DesignLights Consortium® (DLC) 5.1 Premium listed. IP65 Rated.



## Performance Data

FSC Part #	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy	Replaces
CP-S-5L-AOK	Small	10	3000	1370	137	50W High Pressure Sodium
		10	4000	1520	152	
		10	5000	1470	147	
		20	3000	2620	131	2 x 32W Compact Fluorescent
		20	4000	2940	147	
		20	5000	2820	141	
		35	3000	4410	126	2 x 42W Compact Fluorescent
		35	4000	4970	142	
		35	5000	4795	137	
CP-M-10L-AOK	Medium	40	3000	5360	134	100W Metal Halide
		40	4000	5960	149	
		40	5000	5720	143	
		60	3000	7680	128	150W High Pressure Sodium
		60	4000	8520	142	
		60	5000	8160	136	
		75	3000	9300	124	175W Metal Halide
		75	4000	10275	137	
		75	5000	9900	132	

## Catalog Ordering

Sample Part #CP-S-5L-AOK

<b>CP</b>						
1	2	3	4	5	6	7

### 1 - Series

**CP**

### 2 - Module

**S-5L** (Small / 10W-20W-35W)  
**M-10L** (Medium / 40W-60W-75W)

### 3 - Type

**AOK** (Adjustable Output and Kelvin Temp 30K, 40K, 50K)

### 4 - Mounting

**Blank** (Surface Mount)

### 5 - Finish

**Blank** (Standard- Dark Bronze)  
**BL** (Black)<sup>1</sup>  
**WH** (White)<sup>1</sup>

### 6 - Controls

**Blank** (Integrated Programmable Occupancy Sensor with Remote)<sup>2</sup>  
**PC** (Integrated DC On/Off Photocell)

### 7 - Options

**EM8W** (Emergency Battery Back-Up 8W)

## Notes

**1** - 100 piece MOQ and 90 Days Delivery



**2** - One Remote per Project

## Physical Characteristics



### Dimensions

Version	Depth	Length	Width	Weight
Small	3.7"	8"	8"	3.8 lbs
Medium	4.2"	10"	10"	6.2 lbs

20W, 30W, 40W

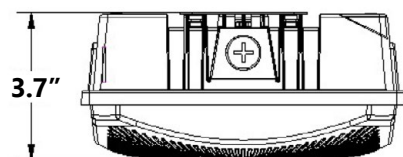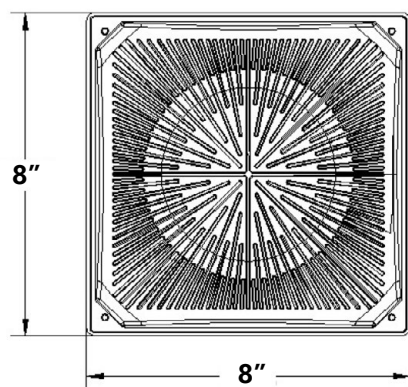

40W, 60W, 75W

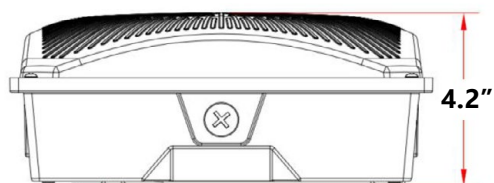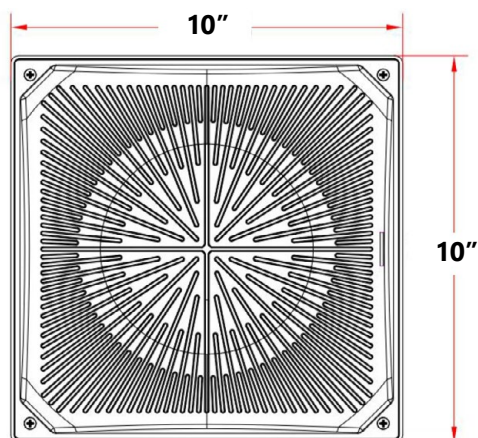

---

## Tunable Instructions

---


### Color Tunable Instructions



1. The color temperature of the light turns to 3000K when the DIP switch is set to 3K.
2. The color temperature of the light turns to 4000K when the DIP switch is set to 4K.
3. The color temperature of the light turns to 5000K when the DIP switch is set to 5K.

**Note:** Please turn off the power before adjusting the color temperature.

### Wattage Tunable Instructions



Turn the DIP switch to different position, the power of the light will change to the corresponding wattage.

**Note:** Please turn off the power before adjusting the wattage.